
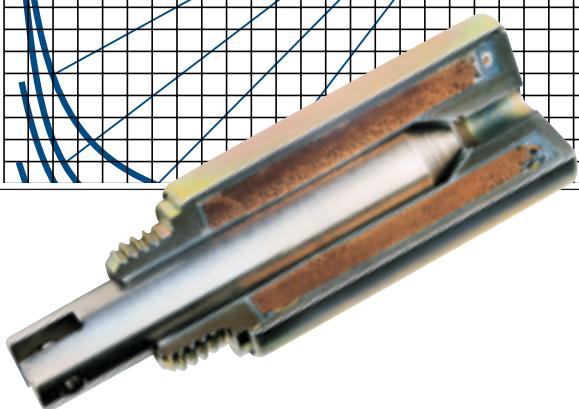


saia-burgess

Smart solutions for comfort and safety

Ledex® Tubular Linear Solenoids

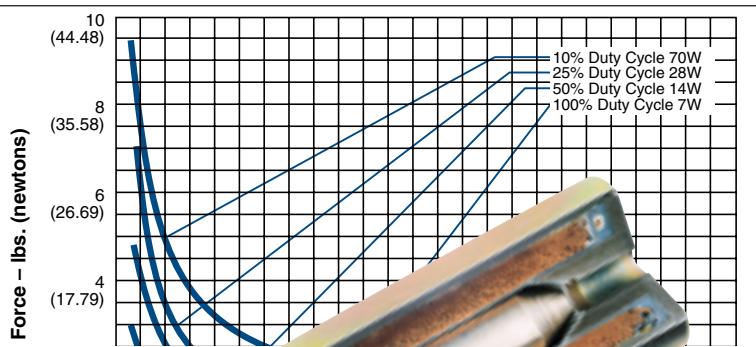

Ledex® Tubular Solenoids




The Ledex STA Series of tubular solenoids is available in three sizes of 1/2", 3/4" and 1" diameter. Both push and pull types are available. Additionally, each size and type is available with a choice of two plunger configurations: flat face and 60°, as well as with or without an anti-rotation flat on the mounting bushing. These options offer maximum force for a wide range of applications. The new design also improves performance and provides longer life than previous tubular designs. They offer quiet operation and improved reliability for demanding applications.

Design Considerations

Pull versus Push Type

In Pull type solenoids, the plunger is pulled into the solenoid coil when the coil is energized. In Push type solenoids, the same is true, however, the plunger has a shaft extension which then pushes out through a hole in the end of the solenoid case. Please note, however, that the magnetic field cannot be reversed to cause the opposite action to occur.

Pull Type

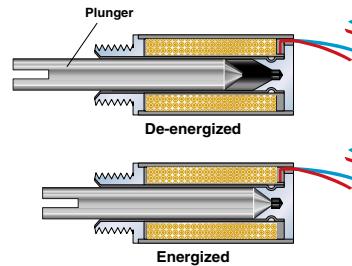

- STA® Series has enhanced design features and improved performance

- Push and pull models

- Strokes up to 2½"

- Life rating of 25 million actuations for STA designs




Performance Curves

The performance curves in this section serve as guides to determine the solenoid size needed to produce a desired force at a given stroke, duty cycle, and power source. All curves were developed under the following standard test conditions: ambient temperature of 20°C, 65% relative humidity.

Starting Force

When determining an application's force requirement, apply a 1.5 safety factor. For example: a load requiring 4.5 lb of force should utilize a solenoid providing 4.5 x 1.5 or 6.75 lb of force.

Push Type

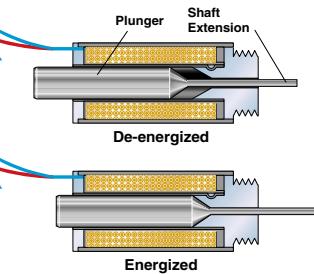

Duty Cycle

Duty cycle is determined by: ON time/(ON + OFF time).

For example: a solenoid is actuated for 30 seconds, then off for 90 seconds.
 $30 \text{ sec ON} / (30 \text{ Sec ON} + 90 \text{ sec OFF}) = 30/120 = 1/4 \text{ or } 25\% \text{ duty cycle.}$

Ledex tubular solenoids are rated for various duty cycles ranging from continuous to 10% duty.

Note that maximum ON time for a particular application can be a factor which overrides the duty cycle rating. For example, at 25% duty cycle, the maximum ON time for a given Ledex solenoid is 36 seconds. If, however, the solenoid is operated at a cycle rate which enables the unit to return to ambient temperature between ON cycles, then the maximum ON time is extended somewhat. In the above example, this extended ON time is 44 seconds. Maximum ON time ratings are listed on the individual model specification pages.

Ledex® Tubular Solenoids

Life

When selecting a tubular solenoid, as with any other solenoid style, it is important to consider the effects of heat on life. When used with a constant voltage supply, an increase in coil temperature reduces the work output and the life of the unit. Standard life is 25,000,000 actuations for STA designs.

Power Requirements

Voltage applied to the solenoid must be matched to the coil wire size for proper operation. Solenoids are cataloged in coil awgs ranging from #23 up to #37 to accommodate your input power. Refer to the individual model specification pages for coil wire awg recommendations. Many other coil awg sizes are available. Please feel free to contact our application engineering department for availability.

Tubular Applications

The STA Series is particularly ideal for applications where field service is prohibitive. Its long life and high reliability are definite advantages in applications involving:

- Computer peripherals
- Industrial sewing machines
- Automated teller machines
- Blood analyzers
- Gate mechanisms
- Packaging machinery
- Door interlocks
- Sorting machines
- Glue dispensers
- Laboratory equipment
- Business machines

STA Construction

The STA is constructed with a low friction nylon bobbin which insures a 25 million actuations life rating on all models.

The problems associated with powdered metal flaking in typical tubular designs is eliminated with the metal-to-plastic bearing surface. In addition, the new design's case is rolled over both ends of the unit for greater shock and vibration integrity, allowing the STA to withstand severe applications in which typical solenoids may come apart.

Both push and pull models offer a built-in combination air gap spacer and plunger stop. This feature eliminates the need for external E-rings and impact washers which typically fail prematurely, as well as get in the way of your attached mechanisms.

All units are provided with 10" PVC lead wires as standard, and are rated for a maximum coil temperature of 150°C. UL-approved materials are used in the construction. For higher temperature applications up to 180°C, please consult the factory for alternate materials which are available in some models. Mechanical and electrical ratings may also be affected. Other options include: special

plunger configurations, springs, special mounting features, and anti-rotation flats on mounting bushings. Please consult the factory with details about your application as tooling may apply to some features.

STA Plunger Configurations

With two standard plunger configurations to choose from, the new STA Series offers stroke lengths up to 0.70" and up to 24 pounds of force.

A. Flat Face




Flat Face
(180°)

For strokes typically less than 0.060", the flat face plunger is recommended with a pull or push force three to five times greater than 60° plungers.

B. 60° Angle



For longer strokes up to 0.750", the 60° plunger offers the greatest advantage over the flat face plunger.

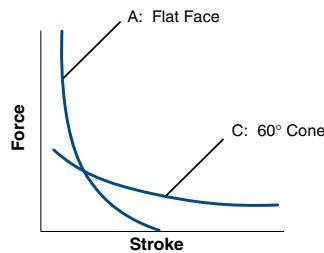

Size 125, 150, 175

Standard Tubular Models for Large Loads

Ledex Size 125, 150, and 175 standard tubular models are offered for heavy duty applications requiring larger forces. These standard models are all pull type and offered with 60° plungers. These models feature heavy duty welded mounting brackets, and heavy duty plunger stops to limit plunger travel, provide positive stopping, and keep pole faces from slamming together at the end of stroke.

An impact cushion made of resilient non-magnetic material absorbs energy at the end of the stroke. This cushion also helps eliminate residual magnetism.

Size 125, 150, and 175 models are available with other plunger configurations, in push type models, and with other mountings. Please consult the factory as tooling may apply.

Ledex® Tubular Solenoids Selection

Tubular solenoids are available in seven sizes. The three STA Series sizes are available in both push and pull types.

Use the selection overview chart to determine which size offers the desired performance and mechanical specifications.

Refer to the individual size specification pages for complete performance and mechanical data.

Tubular Selection Overview

Size	Solenoid Type	Package Dimension (in)	Max Stroke (in)	Nominal Stroke (in)	Force (lbs) @ Nominal Stroke and Specified Duty Cycle				
					100%	50%	25%	10%	
STA ½" x ½"	Pull	0.52	0.55	0.10	0.05	0.18	0.30	0.50	1.0
STA ½" x ½"	Push	0.52	0.55	0.10	0.05	0.08	0.18	0.25	0.6
STA ½" x 1"	Pull	0.52	1.05	0.50	0.10	0.19	0.31	0.56	1.00
STA ½" x 1"	Push	0.52	1.05	0.50	0.10	0.13	0.25	0.48	0.94
STA ¾" x 1½"	Pull	0.77	1.56	0.70	0.20	0.50	1.00	1.63	2.69
STA ¾" x 1½"	Push	0.77	1.56	0.70	0.20	0.38	0.80	1.50	2.75
STA 1" x 2"	Pull	1.02	2.05	0.70	0.30	0.90	1.75	3.00	5.20
STA 1" x 2"	Push	1.02	2.05	0.70	0.30	0.75	1.88	2.90	5.20
1¼" x 2 ¼"	Pull	1.25	2.25	0.75	0.40	1.00	2.00	4.00	6.50
1½" x 2 ½"	Pull	1.50	2.50	0.75	0.40	1.00	2.50	5.20	9.80
1¾" x 4 ¾"	Pull	1.75	4.71	2.50	1.00	1.25	2.50	3.75	6.50

All data is at 20°C coil temperature. Force outputs degrade with elevated temperatures.

How to Use Tubular Performance Charts

1. Select one of the four columns which provides the appropriate duty cycle. (For example 50%).

2. Reading down this column provides a variety of performance and electrical data including maximum on time, watts, and amp turns.

3. Following down the column further into the VDC ratings, select the voltage which most closely matches your supply voltage. (For example, 11.5 for a 12 VDC power supply.)

4. Read across (to the left) to select the awg suffix . (In this example, 32 awg is required, thus to order, specify: 195203-232. Note that the digit preceding the awg refers to the plunger configuration and anti-rotation flat selected. Review the STA plunger section on page E3 and on the individual specification page to select the appropriate plunger configuration.

Note: The size 125, 150 and 175 standard models do not use this plunger configuration and anti-rotation flat suffix system.

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously	∞	50	5	2
Maximum ON Time (sec) for single pulse	∞	140	30	8
Watts (@ 20°C)	4	8	16	40
Ampere Turns (@ 20°C)	497	704	994	1573

Coil Data

awg (0XX)	Resistance (@20°C)	# Turns	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
27	1.43	306	2.4	3.4	4.8	7.6
28	1.95	342	2.8	3.9	5.6	8.8
29	3.84	508	3.9	5.5	7.8	12.4
30	5.29	572	4.6	6.5	9.2	14.5
31	9.56	795	6.2	8.8	12.4	19.6
32	16.54	1068	8.1	11.5	16.3	25.7
33	22.60	1194	9.5	13.4	19.0	30.0
34	37.41	1547	12.2	17.3	24.0	39.0
35	60.71	1976	15.6	22.0	31.0	49.0
36	96.19	2475	19.6	28.0	39.0	62.0
37	149.93	3060	24.5	35.0	49.0	77.0

Ledex® Tubular Solenoids Design Modifications

Options and Modified Designs

Even though many solenoid designs are in stock and available via distribution, our customers often require a product with unique features or performance capabilities. In fact, almost 80% of all solenoids that we make are either modified or custom built to meet our customers' exact application requirements.

So, if you don't find what you're looking for in the catalog, give us a call to discuss your needs with one of our application engineers.

Typical Examples of Custom Features



Elliptical



Clevis-grooved



Flattened



Clevis-tongue



Drilled hole



Notched




Threaded rod



Tapped hole

STA® Pull Tubular Solenoids — ½" Dia. x ½"

Part Number: 195200 - **X** **XX**

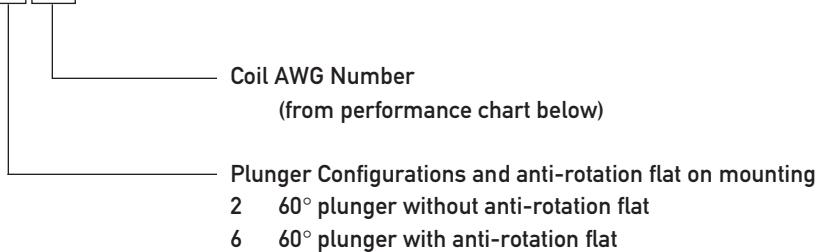

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	50	5	2
Maximum ON Time (sec) for single pulse ²	∞	140	30	8
Watts (@ 20°C)	3	6	12	30
Ampere Turns (@ 20°C)	268	379	536	847

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
27	0.48	108	1.2	1.7	2.4	3.8
28	0.67	123	1.5	2.1	2.9	4.6
29	1.33	184	1.9	2.7	3.9	6.1
30	1.80	204	2.4	3.3	4.7	7.5
31	3.33	290	3.1	4.4	6.2	9.7
32	4.57	325	3.8	5.3	7.5	11.9
33	7.80	432	4.8	6.8	9.7	15.3
34	13.10	567	6.2	8.8	12.4	19.6
35	17.80	630	7.6	11.0	15.0	24.0
36	29.05	808	9.6	14.0	19.0	30.0
37	45.70	1008	12.2	17.0	24.0	38.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength	500 VRMS
Recommended Minimum Heat Sink	Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 2" square by ¼" thick
Coil Resistance	±5% tolerance
Weight	0.51 oz (14.5 gms)
Dimensions	Ø0.52" x 0.55" L (See page E25)

How to Order

Add the plunger configuration, anti-rotation flat number, and the coil awg number to the part number (for example: to order a unit with a 60° plunger configuration without an anti-rotation flat rated for 5 VDC at 25% duty cycle, specify 195200-230).


Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.


STA® Pull Tubular Solenoids — ½" Dia. x ½"

Pull Tubular Solenoid — ½" dia. x ½" — 60° Plunger

Typical Force @ 20°C

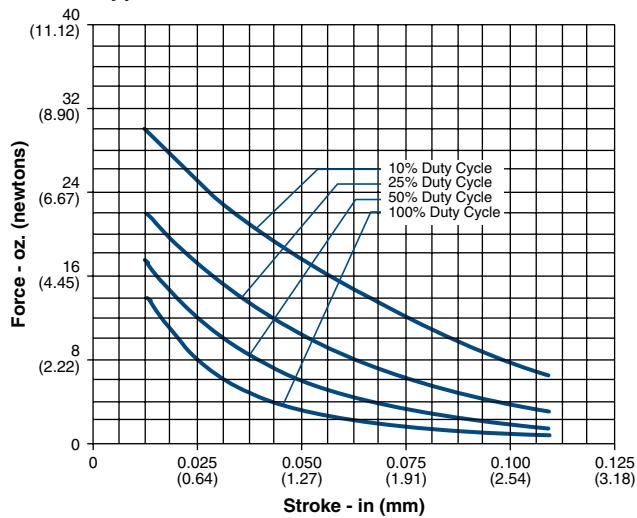

Typical Speed @ No Load, 20°C

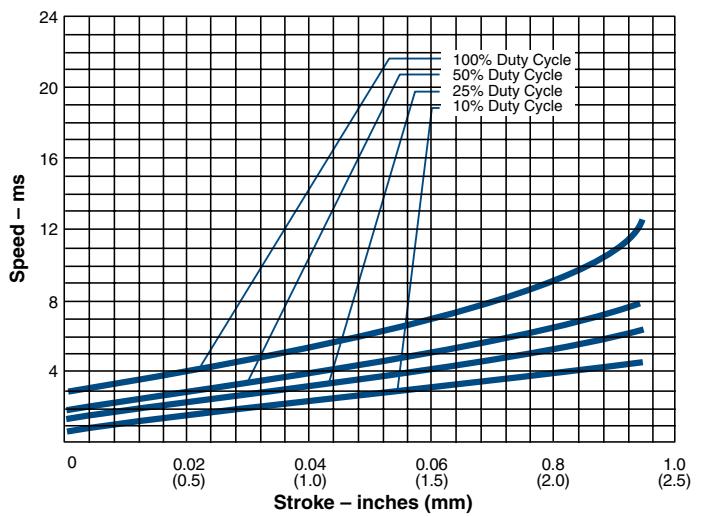

All specifications subject to change without notice.

STA® Push Tubular Solenoids — 1/2" Dia. x 1/2"

Part Number: 195201-**X****XX**

Coil AWG Number

(from performance chart below)

Plunger Configurations and anti-rotation flat on mounting

2 60° plunger without anti-rotation flat

6 60° plunger with anti-rotation flat

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	50	5	2
Maximum ON Time (sec) for single pulse ²	∞	140	30	8
Watts (@ 20°C)	3	6	12	30
Ampere Turns (@ 20°C)	268	379	536	847

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
27	0.48	108	1.2	1.7	2.4	3.8
28	0.67	123	1.5	2.1	2.9	4.6
29	1.33	184	1.9	2.7	3.9	6.1
30	1.80	204	2.4	3.3	4.7	7.5
31	3.33	290	3.1	4.4	6.2	9.7
32	4.57	325	3.8	5.3	7.5	11.9
33	7.80	432	4.8	6.8	9.7	15.3
34	13.10	567	6.2	8.8	12.4	19.6
35	17.80	630	7.6	11.0	15.0	24.0
36	29.05	808	9.6	14.0	19.0	30.0
37	45.70	1008	12.2	17.0	24.0	38.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength

500 VRMS

Recommended Minimum Heat Sink

Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 2" square by 1/8" thick

±5% tolerance

0.51 oz (14.5 gms)

Ø0.52" x 0.55" L (See page E25)

Coil Resistance

Weight

Dimensions

How to Order

Add the plunger configuration, anti-rotation flat number, and the coil awg number to the part number (for example: to order a unit with a 60° plunger configuration without an anti-rotation flat rated for 5 VDC at 25% duty cycle, specify 195201-230).


Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.


STA® Push Tubular Solenoids — ½" Dia. x ½"

Push Tubular Solenoid — ½" dia. x 1" — 60° Plunger

Typical Force @ 20°C

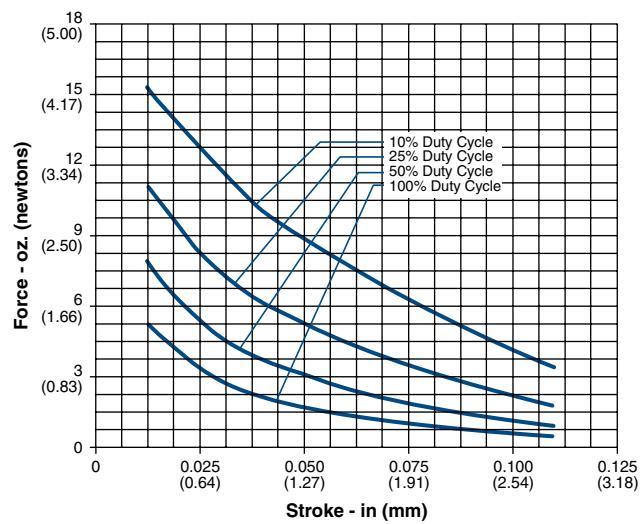

Typical Speed @ No Load, 20°C

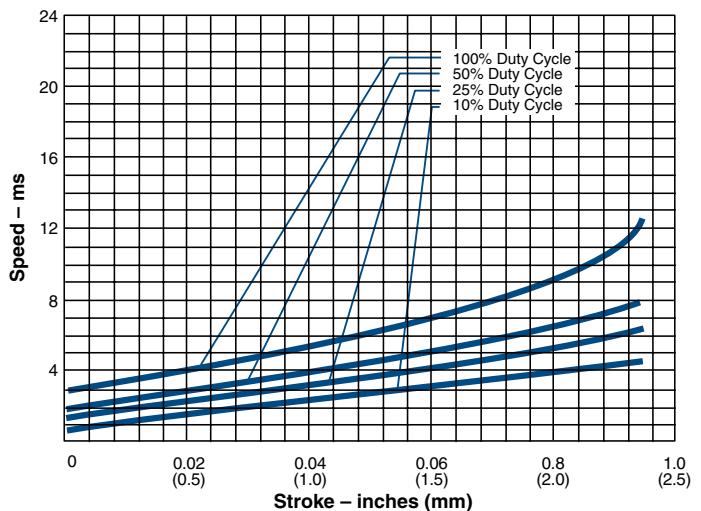

All specifications subject to change without notice.

STA® Pull Tubular Solenoids — ½" Dia. x 1"

Part Number: 195202 - **X** **XX**

Coil AWG Number

(from performance chart below)

Plunger Configurations and anti-rotation flat on mounting

- 1 Flat face plunger without anti-rotation flat
- 2 60° plunger without anti-rotation flat
- 5 Flat face plunger with anti-rotation flat
- 6 60° plunger with anti-rotation flat

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	50	5	2
Maximum ON Time (sec) for single pulse ²	∞	140	30	8
Watts (@ 20°C)	4	8	16	40
Ampere Turns (@ 20°C)	497	704	994	1573

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
27	1.43	306	2.4	3.4	4.8	7.6
28	1.95	342	2.8	3.9	5.6	8.8
29	3.84	508	3.9	5.5	7.8	12.4
30	5.29	572	4.6	6.5	9.2	14.5
31	9.56	795	6.2	8.8	12.4	19.6
32	16.54	1068	8.1	11.5	16.3	25.7
33	22.60	1194	9.5	13.4	19.0	30.0
34	37.41	1547	12.2	17.3	24.0	39.0
35	60.71	1976	15.6	22.0	31.0	49.0
36	96.19	2475	19.6	28.0	39.0	62.0
37	149.93	3060	24.5	35.0	49.0	77.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength

500 VRMS

Recommended Minimum Heat Sink

Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 2" square by ¼" thick

±5% tolerance

Flat Face: 1.18 lb (5.25 N) @ 20°C
60°: 0.90 lb (4.00 N) @ 20°C

0.87 oz (24.7 gms)

0.16 oz (4.54 gms)

Ø0.52" x 1.05" L (See page E26)

How to Order

Add the plunger configuration, anti-rotation flat number, and the coil awg number to the part number (for example: to order a unit with a 60° plunger configuration without an anti-rotation flat rated for 5 VDC at 25% duty cycle, specify 195202-227).


Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.


STA® Pull Tubular Solenoids — ½" Dia. x 1"

Pull Tubular Solenoid — ½" dia. x 1" — Flat Face Plunger

Typical Force @ 20°C

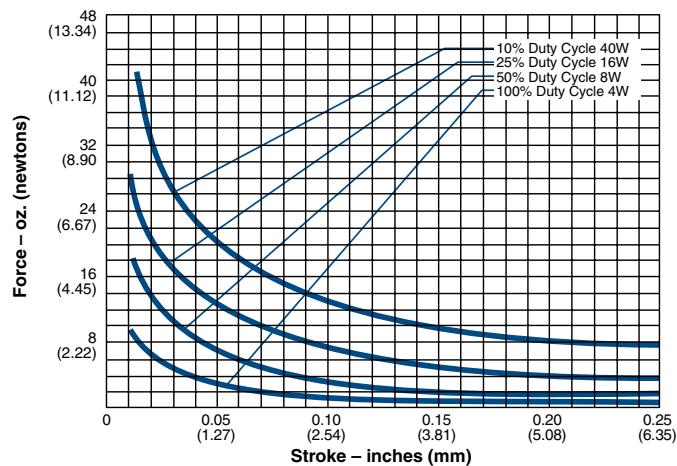


Typical Speed @ No Load, 20°C

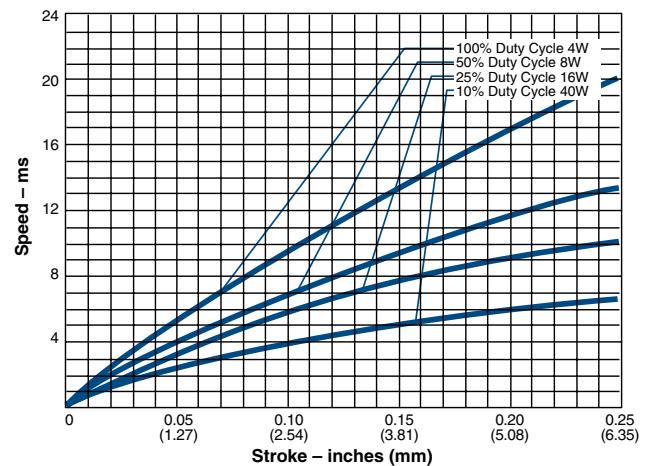


Pull Tubular Solenoid — ½" dia. x 1" — 60° Plunger

Typical Force @ 20°C

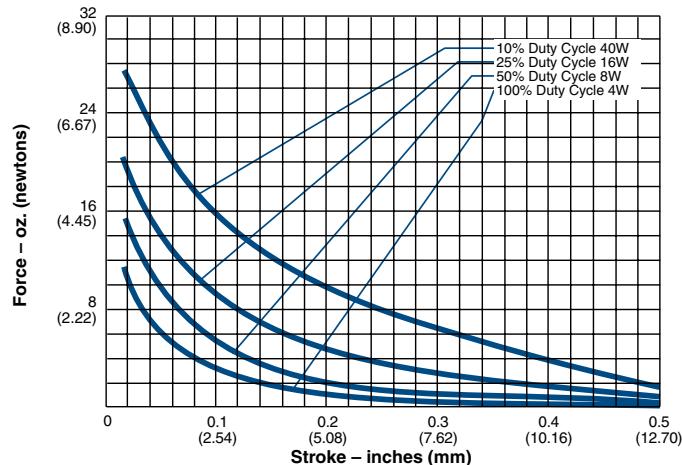


Typical Speed @ No Load, 20°C

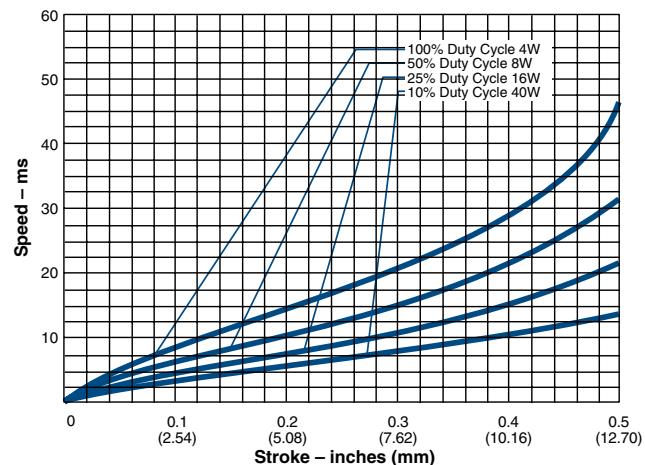

All specifications subject to change without notice.

STA® Push Tubular Solenoids — 1/2" Dia. x 1"

Part Number: 195203 - **X XX**



Coil AWG Number

(from performance chart below)

Plunger Configurations and anti-rotation flat on mounting

- 1 Flat face plunger without anti-rotation flat
- 2 60° plunger without anti-rotation flat
- 5 Flat face plunger with anti-rotation flat
- 6 60° plunger with anti-rotation flat

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	50	5	2
Maximum ON Time (sec) for single pulse ²	∞	140	30	8
Watts (@ 20°C)	4	8	16	40
Ampere Turns (@ 20°C)	497	704	994	1573

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
27	1.43	306	2.4	3.4	4.8	7.6
28	1.95	342	2.8	3.9	5.6	8.8
29	3.84	508	3.9	5.5	7.8	12.4
30	5.29	572	4.6	6.5	9.2	14.5
31	9.56	795	6.2	8.8	12.4	19.6
32	16.54	1068	8.1	11.5	16.3	25.7
33	22.60	1194	9.5	13.4	19.0	30.0
34	37.41	1547	12.2	17.3	24.0	39.0
35	60.71	1976	15.6	22.0	31.0	49.0
36	96.19	2475	19.6	28.0	39.0	62.0
37	149.93	3060	24.5	35.0	49.0	77.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength	500 VRMS
Recommended Minimum Heat Sink	Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 2" square by 1/8" thick
Coil Resistance	±5% tolerance
Holding Force	Flat Face: 1.00 lb (4.45 N) @ 20°C 60°: 0.71 lb (3.16 N) @ 20°C
Weight	0.89 oz (25.2 gms)
Plunger Weight	0.11 oz (3.12 gms)
Dimensions	Ø0.52" x 1.05" L (See page E26)

How to Order

Add the plunger configuration, anti-rotation flat number and the coil awg number to the part number (for example: to order a unit with a 60° plunger configuration without anti-rotation rated for 5 VDC at 25% duty cycle, specify 195203-227).


Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.


STA® Push Tubular Solenoids — ½" Dia. x 1"

Push Tubular Solenoid — ½" dia. x 1" — Flat Face Plunger

Typical Force @ 20°C

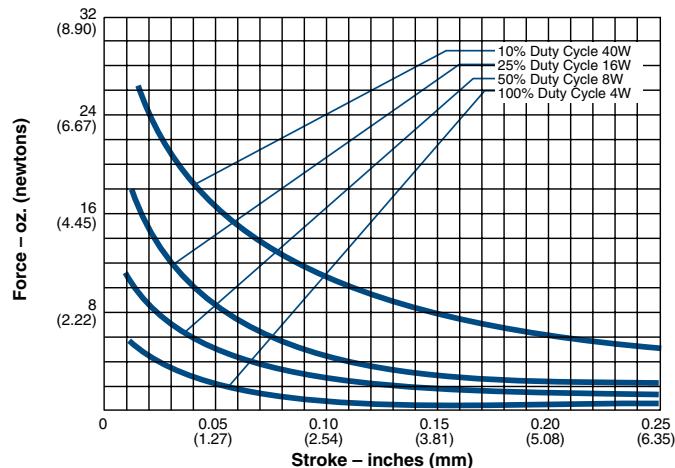


Typical Speed @ No Load, 20°C

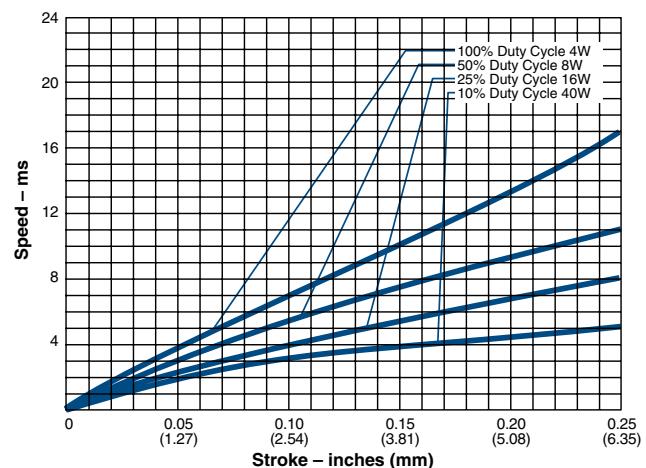


Push Tubular Solenoid — ½" dia. x 1" — 60° Plunger

Typical Force @ 20°C

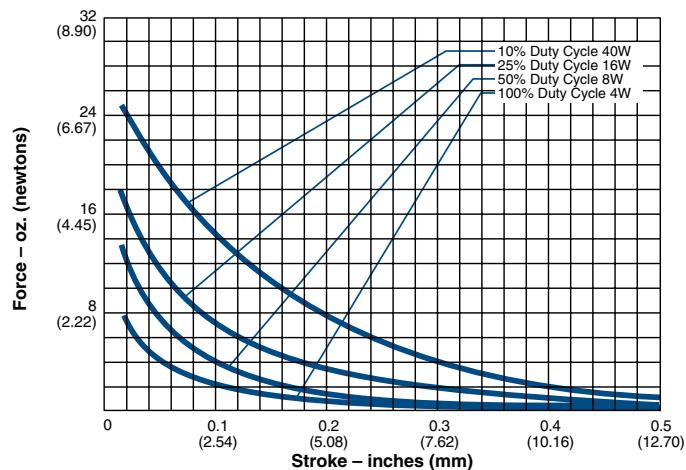


Typical Speed @ No Load, 20°C

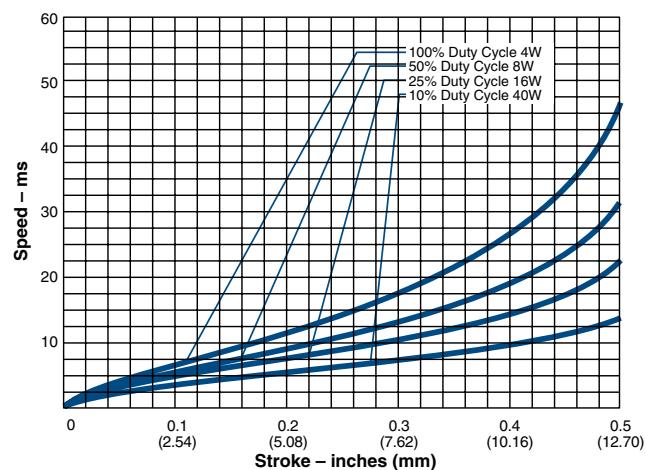

All specifications subject to change without notice.

STA® Pull Tubular Solenoids — 5/4" Dia. x 1½"

Part Number: 195204 - **X** **XX**



Coil AWG Number

(from performance chart below)

Plunger Configurations and anti-rotation flat on mounting

- 1 Flat face plunger without anti-rotation flat
- 2 60° plunger without anti-rotation flat
- 5 Flat face plunger with anti-rotation flat
- 6 60° plunger with anti-rotation flat

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	230	25	6
Maximum ON Time (sec) for single pulse ²	∞	265	63	15
Watts (@ 20°C)	7	14	28	70
Ampere Turns (@ 20°C)	855	1200	1700	2700

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
24	1.10	330	2.7	3.8	5.6	8.8
25	2.13	488	3.9	5.5	7.7	12.2
26	2.90	544	4.5	6.4	9.0	14.2
27	5.27	760	6.1	8.6	12.1	19.2
28	9.15	1026	8.0	11.3	16.0	25.0
29	12.50	1146	9.4	13.2	18.7	30.0
30	20.70	1491	12.0	17.0	24.0	38.0
31	33.60	1904	15.0	22.0	31.0	48.0
32	53.50	2394	19.4	27.0	39.0	61.0
33	83.50	2970	24.0	34.0	48.0	76.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength	1000 VRMS
Recommended	Maximum watts dissipated by solenoid
Minimum Heat Sink	are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 3" square by 1/8" thick
Coil Resistance	±5% tolerance
Holding Force	Flat Face: 5.24 lb (23.31 N) @ 20°C 60°: 2.88 lb (12.81 N) @ 20°C
Weight	2.95 oz (83.6 gms)
Plunger Weight	0.71oz (20.13 gms)
Dimensions	Ø0.77" x 1.56" L (See page E27)

How to Order

Add the plunger number and the coil awg number to the part number (for example: to order a unit with a 60° plunger configuration without an anti-rotation flat rated for 12 VDC at 25% duty cycle, specify 195204-227).


Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.


STA® Pull Tubular Solenoids — $\frac{3}{4}$ " Dia. x $1\frac{1}{2}$ "

Pull Tubular Solenoid — $\frac{3}{4}$ " dia. x $1\frac{1}{2}$ " — Flat Face Plunger

Typical Force @ 20°C

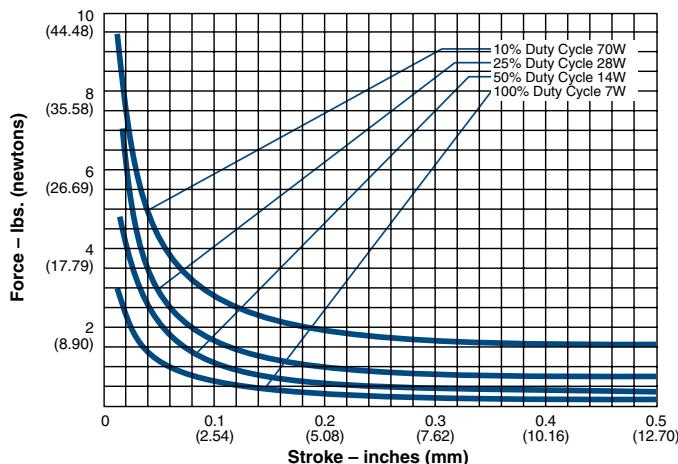


Typical Speed @ No Load, 20°C

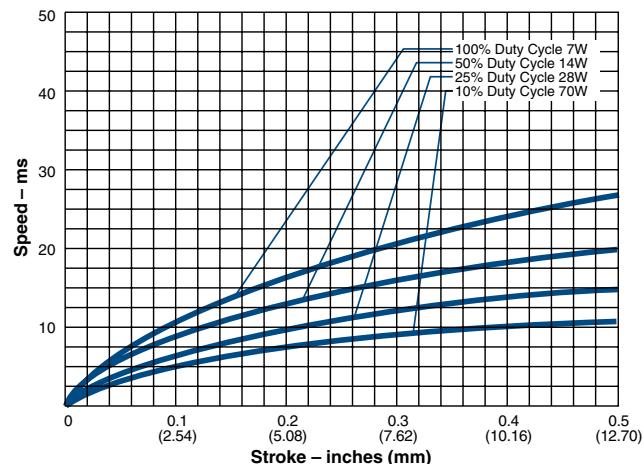


Pull Tubular Solenoid — $\frac{3}{4}$ " dia. x $1\frac{1}{2}$ " — 60° Plunger

Typical Force @ 20°C

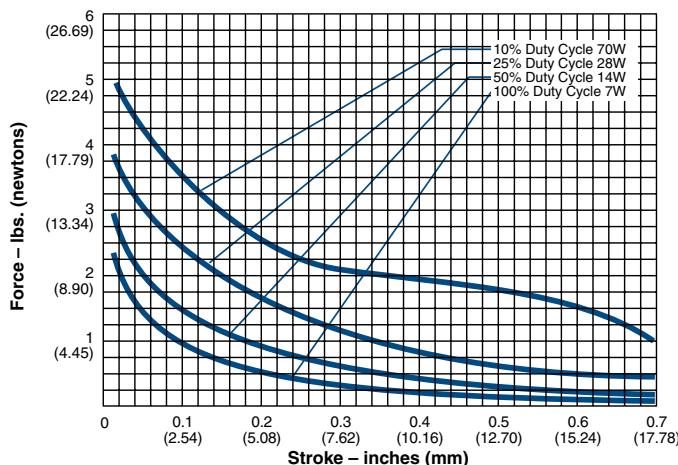


Typical Speed @ No Load, 20°C

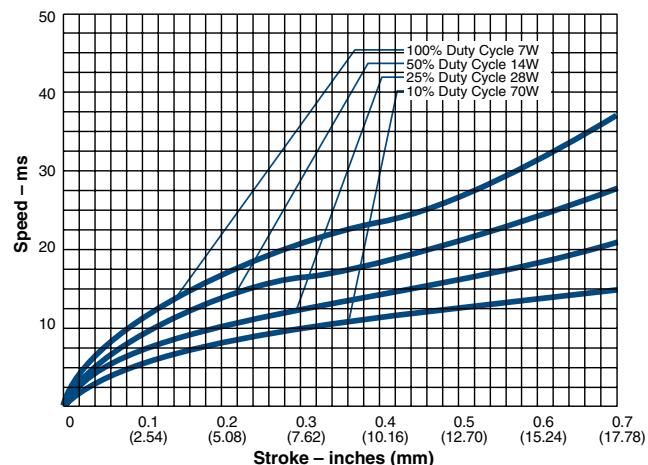

All specifications subject to change without notice.

STA® Push Tubular Solenoids — ¾" Dia. x 1½"

Part Number: 195205 - **X** **XX**



Coil AWG Number

(from performance chart below)

Plunger Configurations and anti-rotation flat on mounting

- 1 Flat face plunger without anti-rotation flat
- 2 60° plunger without anti-rotation flat
- 5 Flat face plunger with anti-rotation flat
- 6 60° plunger with anti-rotation flat

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	230	25	6
Maximum ON Time (sec) for single pulse ²	∞	265	63	15
Watts (@ 20°C)	7	14	28	70
Ampere Turns (@ 20°C)	855	1200	1700	2700

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
24	1.10	330	2.7	3.8	5.6	8.8
25	2.13	488	3.9	5.5	7.7	12.2
26	2.90	544	4.5	6.4	9.0	14.2
27	5.27	760	6.1	8.6	12.1	19.2
28	9.15	1026	8.0	11.3	16.0	25.0
29	12.50	1146	9.4	13.2	18.7	30.0
30	20.70	1491	12.0	17.0	24.0	38.0
31	33.60	1904	15.0	22.0	31.0	48.0
32	53.50	2394	19.4	27.0	39.0	61.0
33	83.50	2970	24.0	34.0	48.0	76.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength

1000 VRMS

Recommended Minimum Heat Sink

Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 3" square by ¼" thick

±5% tolerance

Flat Face: 4.95 lb (22.02 N) @ 20°C
60°: 2.85 lb (12.68 N) @ 20°C

3.08 oz (87.3 gms)

0.53 oz (15.03 gms)

Ø0.77" x 1.56" L (See page E27)

How to Order



Add the plunger number and the coil awg number to the part number (for example: to order a unit with a 60° plunger configuration without an anti-rotation flat rated for 12 VDC at 25% duty cycle, specify 195205-227).

Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.



All specifications subject to change without notice.

STA® Push Tubular Solenoids — $\frac{3}{4}$ " Dia. x $1\frac{1}{2}$ "

Push Tubular Solenoid — $\frac{3}{4}$ " dia. x $1\frac{1}{2}$ " — Flat Face Plunger

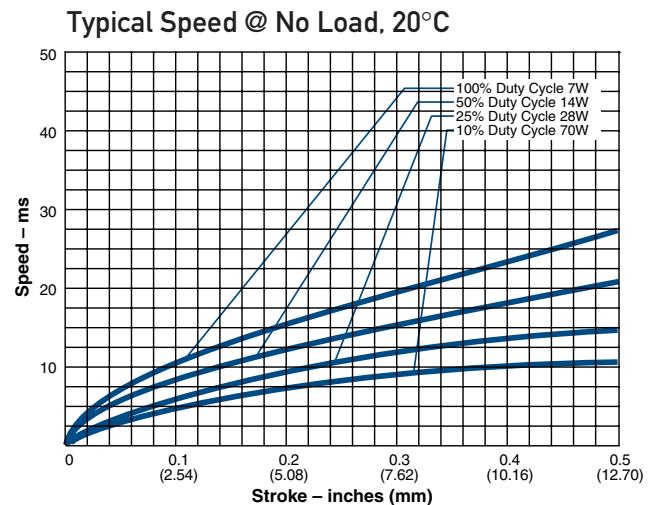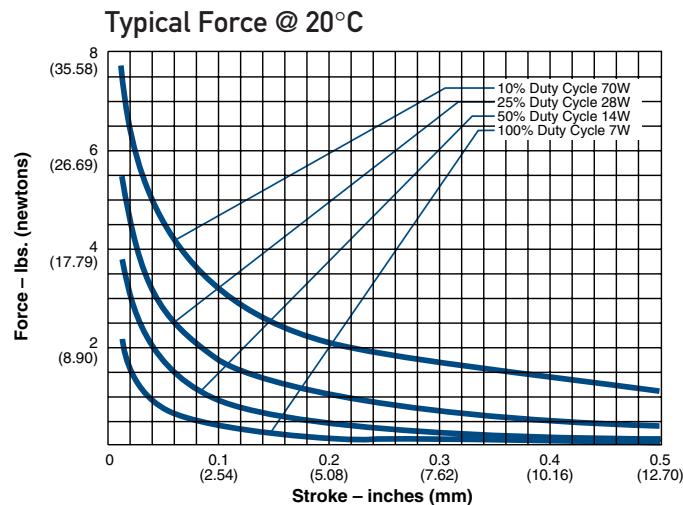

Push Tubular Solenoid — $\frac{3}{4}$ " dia. x $1\frac{1}{2}$ " — 60° Plunger

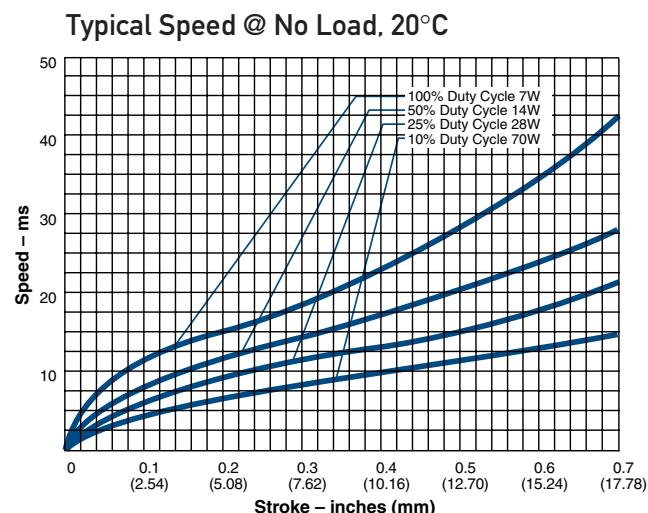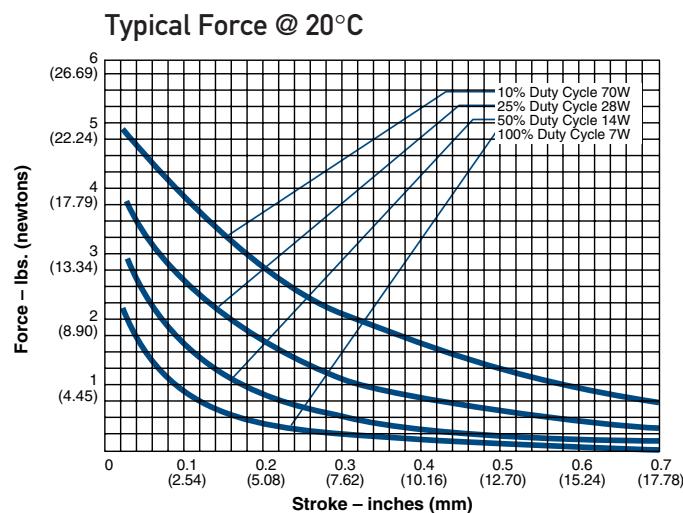

All specifications subject to change without notice.

STA® Pull Tubular Solenoids — 1" Dia. x 2"

Part Number: 195206 - **X XX**



Coil AWG Number

(from performance chart below)

Plunger Configurations and anti-rotation flat on mounting

- 1 Flat face plunger without anti-rotation flat
- 2 60° plunger without anti-rotation flat
- 5 Flat face plunger with anti-rotation flat
- 6 60° plunger with anti-rotation flat

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	360	32	8
Maximum ON Time (sec) for single pulse ²	∞	470	120	32
Watts (@ 20°C)	10	20	40	100
Ampere Turns (@ 20°C)	1166	1649	2332	3688

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	1.96	536	4.4	6.3	8.9	14.0
24	2.69	600	5.2	7.3	10.4	16.4
25	4.89	840	7.0	9.9	14.0	22.0
26	8.44	1128	9.2	13.0	18.4	29.0
27	11.50	1260	10.7	15.2	21.0	34.0
28	19.20	1645	13.8	19.6	28.0	44.0
29	31.20	2104	17.7	25.0	35.0	56.0
30	49.60	2646	22.0	31.0	45.0	70.0
31	77.40	3280	28.0	39.0	56.0	88.0
32	119.00	4026	35.0	49.0	69.0	109.0
33	202.00	5317	45.0	64.0	90.0	142.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength

1000 VRMS

Recommended Minimum Heat Sink

Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 4" square by $\frac{1}{8}$ " thick

$\pm 5\%$ tolerance

Flat Face: 13.83 lb (61.52 N) @ 20°C
60°: 6.61 lb (29.40 N) @ 20°C

6.96 oz (197.3 gms)

1.60 oz (45.36 gms)

Ø1.02" x 2.05" L (See page E28)

How to Order

Add the plunger configuration number and the coil awg number to the part number (for example: to order a unit with a 60° plunger rated for 21 VDC at 25% duty cycle, specify 195206-227).


Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.


STA® Pull Tubular Solenoids — 1" Dia. x 2"

Pull Tubular Solenoid – 1" dia. x 2" – Flat Face Plunger

Typical Force @ 20°C

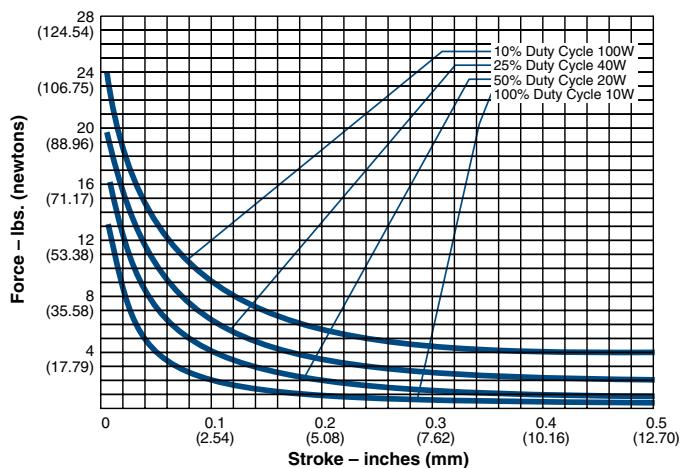


Typical Speed @ No Load, 20°C

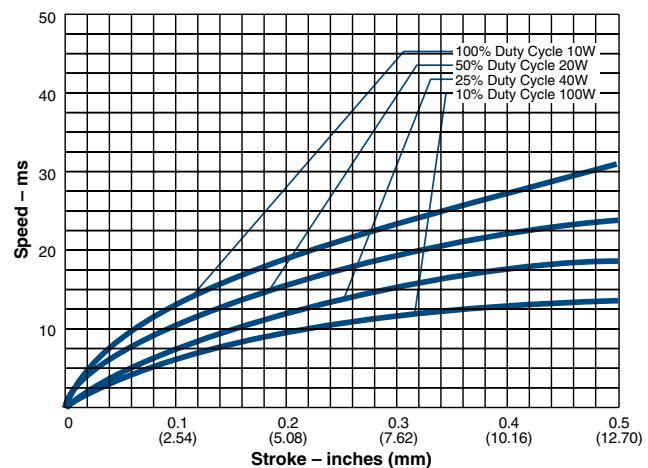


Pull Tubular Solenoid – 1" dia. x 2" – 60° Plunger

Typical Force @ 20°C

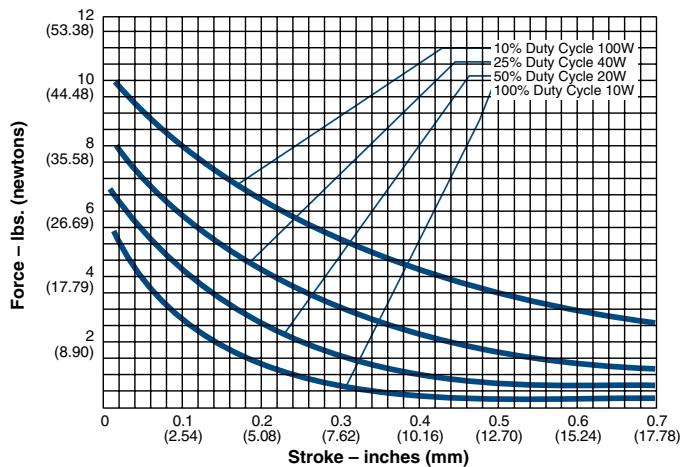


Typical Speed @ No Load, 20°C

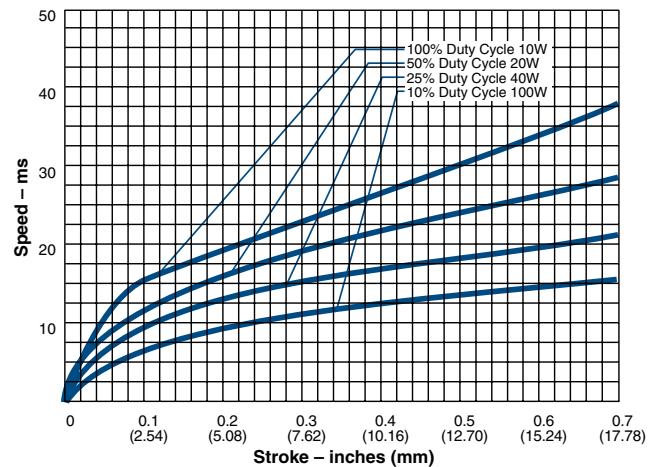

All specifications subject to change without notice.

STA® Push Tubular Solenoids — 1" Dia. x 2"

Part Number: 195207 - **X** **XX**



Coil AWG Number

(from performance chart below)

Plunger Configurations and anti-rotation flat on mounting

- 1 Flat face plunger without anti-rotation flat
- 2 60° plunger without anti-rotation flat
- 5 Flat face plunger with anti-rotation flat
- 6 60° plunger with anti-rotation flat

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	360	32	8
Maximum ON Time (sec) for single pulse ²	∞	470	120	32
Watts (@ 20°C)	10	20	40	100
Ampere Turns (@ 20°C)	1166	1649	2332	3688

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	1.96	536	4.4	6.3	8.9	14.0
24	2.69	600	5.2	7.3	10.4	16.4
25	4.89	840	7.0	9.9	14.0	22.0
26	8.44	1128	9.2	13.0	18.4	29.0
27	11.50	1260	10.7	15.2	21.0	34.0
28	19.20	1645	13.8	19.6	28.0	44.0
29	31.20	2104	17.7	25.0	35.0	56.0
30	49.60	2646	22.0	31.0	45.0	70.0
31	77.40	3280	28.0	39.0	56.0	88.0
32	119.00	4026	35.0	49.0	69.0	109.0
33	202.00	5317	45.0	64.0	90.0	142.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength

1000 VRMS

Recommended Minimum Heat Sink

Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 4" square by $\frac{1}{8}$ " thick

$\pm 5\%$ tolerance

Flat Face: 11.82 lb (52.58 N) @ 20°C
60°: 6.49 lb (28.87 N) @ 20°C

6.73 oz (190.8 gms)

1.19 oz (33.74 gms)

Ø1.02" x 2.05" L (See page E28)

How to Order

Add the plunger configuration number and the coil awg number to the part number (for example: to order a unit with a 60° plunger rated for 21 VDC at 25% duty cycle, specify 195207-227).


Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.


STA® Push Tubular Solenoids — 1" Dia. x 2"

Push Tubular Solenoid — 1" dia. x 2" — Flat Face Plunger

Typical Force @ 20°C

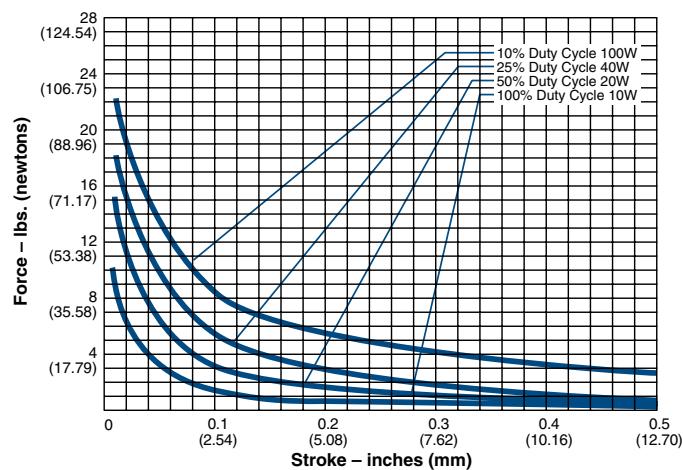


Typical Speed @ No Load, 20°C

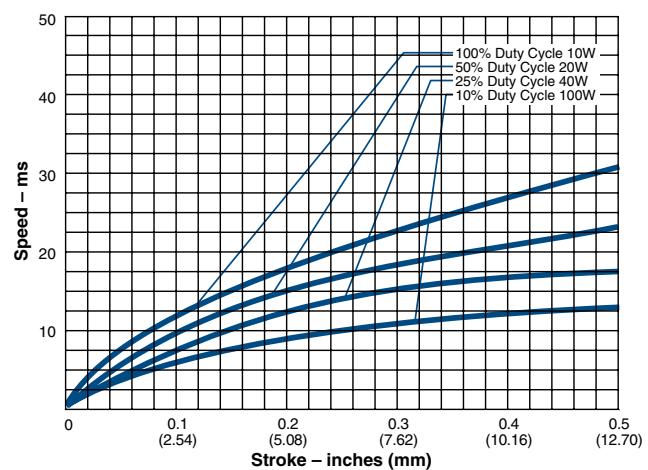


Push Tubular Solenoid — 1" dia. x 2" — 60° Plunger

Typical Force @ 20°C

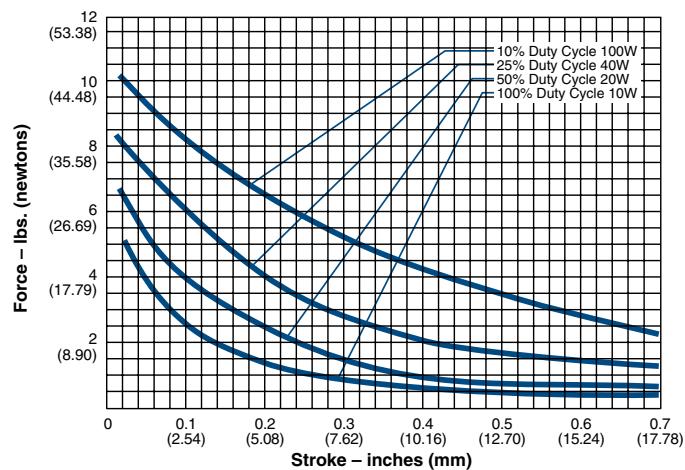

Typical Speed @ No Load, 20°C

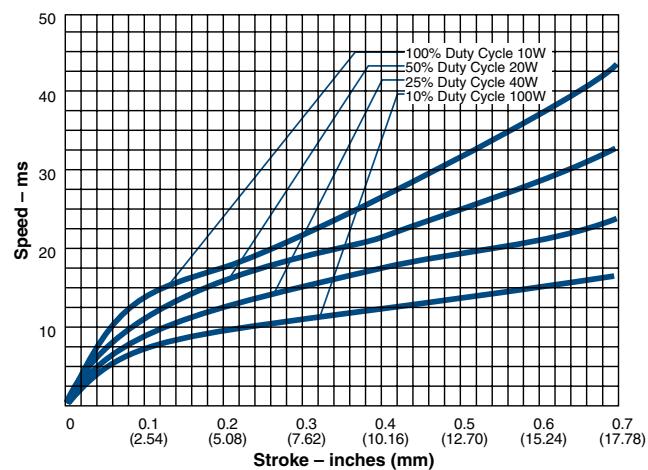

All specifications subject to change without notice.

Ledex® Size 125 Pull Tubular Solenoids — 1 $\frac{1}{4}$ " Dia. x 2 $\frac{1}{4}$ "

Part Number: 174419-0XX

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	390	60	18
Maximum ON Time (sec) for single pulse ²	∞	510	160	45
Watts (@ 20°C)	13	26	52	130
Ampere Turns (@ 20°C)	1500	2121	3000	4743

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	3.52	780	6.8	9.6	13.6	22.0
24	6.04	1056	8.6	12.2	17.2	27.0
25	8.47	1176	10.9	15.4	22.0	34.0
26	14.10	1540	13.8	19.5	28.0	44.0
27	22.50	1970	17.3	24.0	35.0	55.0
28	36.10	2484	22.0	31.0	44.0	69.0
29	55.10	3060	27.0	38.0	54.0	86.0
30	88.10	3805	35.0	49.0	70.0	110.0
31	147.00	5044	44.0	62.0	88.0	139.0
32	214.00	5992	54.0	76.0	107.0	170.0
33	354.00	7744	69.0	98.0	138.0	218.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

Specifications

Dielectric Strength	1000 VRMS
Recommended Minimum Heat Sink	Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 5" square by $\frac{1}{8}$ " thick
Coil Resistance	$\pm 5\%$ tolerance
Holding Force	9 lbs (40.03 N) @ 20°C
Weight	10.41 oz (295 gms)
Dimensions	Ø1.25" x 2.25" L (See page E29)


How to Order

Add the coil awg number (0XX) to the part number (for example: to order a 25% duty cycle unit rated at 35 VDC, specify 174419-027).


Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.

Size 125 Pull — Typical Force @ 20°C

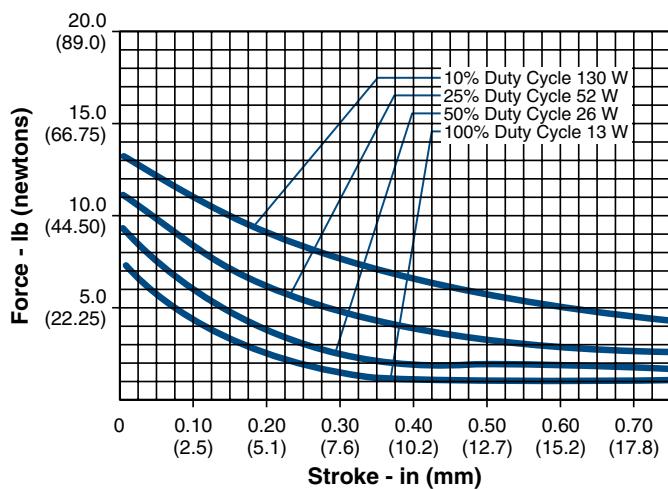

Size 125 Pull — Typical Speed @ No Load, 20°C

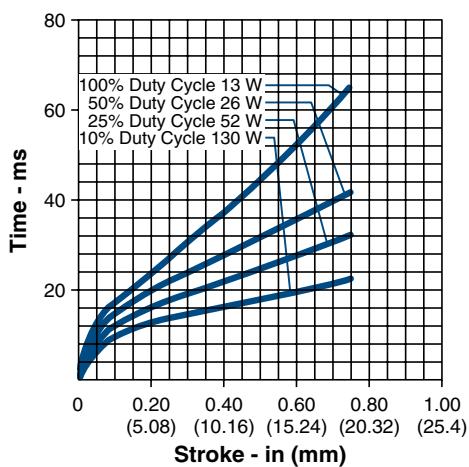

Ledex® Size 150 Pull Tubular Solenoids — 1½" Dia. x 2½"

Part Number: 174432-0XX

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	420	100	25
Maximum ON Time (sec) for single pulse ²	∞	570	252	75
Watts (@ 20°C)	17	34	68	170
Ampere Turns (@ 20°C)	1800	2546	3600	5692

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	5.58	1030	9.8	13.9	19.7	31.0
24	9.30	1344	12.4	17.6	25.0	39.0
25	14.90	1712	15.7	22.0	31.0	50.0
26	24.00	2180	19.9	28.0	40.0	63.0
27	36.90	2680	25.0	35.0	50.0	79.0
28	58.40	3322	32.0	45.0	63.0	100.0
29	87.50	4008	39.0	56.0	79.0	124.0
30	148.00	5292	50.0	71.0	101.0	159.0
31	224.00	6360	63.0	90.0	127.0	200.0
32	344.00	7956	78.0	110.0	155.0	246.0
33	554.00	10070	100.0	141.0	199.0	315.0

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

Specifications

Dielectric Strength	1000 VRMS
Recommended Minimum Heat Sink	Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 6" square by ¼" thick
Coil Resistance	±5% tolerance
Holding Force	14.5 lbs (64.50 N) at 20°C
Weight	17 oz (481.8 gms)
Dimensions	Ø1.50" x 2.50" L (See page E29)

How to Order


Add the coil awg number (0XX) to the part number (for example: to order a 25% duty cycle unit rated at 50 VDC, specify 174432-027).

Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.


All specifications subject to change without notice.

LINEAR Tubular

Size 150 Pull — Typical Force @ 20°C

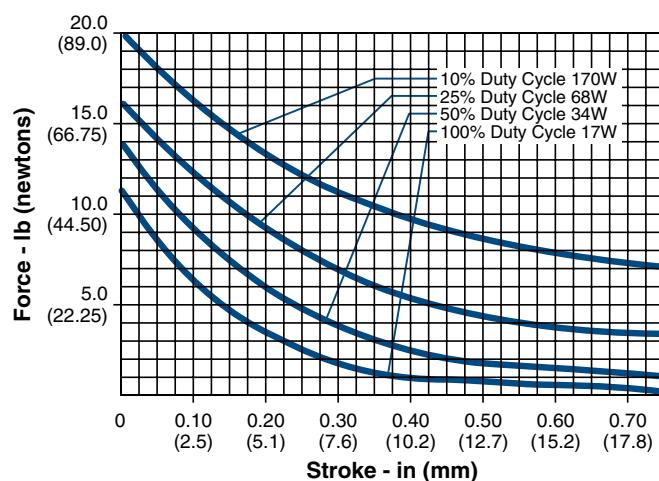

Size 150 Pull — Typical Speed @ No Load, 20°C

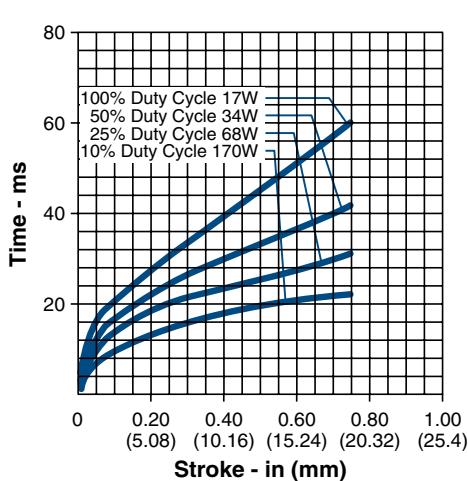

Ledex® Size 175 Pull Tubular Solenoids — 1 $\frac{3}{4}$ " Dia. x 4 $\frac{3}{4}$ "

Part Number: 194580-0XX

Class 180 H UL Recognized
Coil Insulation System

UL File No. E131577

Performance

Maximum Duty Cycle	100%	50%	25%	10%
Maximum ON Time (sec) when pulsed continuously ¹	∞	882	209	54
Maximum ON Time (sec) for single pulse ²	∞	1,200	528	162
Watts (@ 20°C)	20	40	80	200
Ampere Turns (@ 20°C)	2923	4133	5844	9238

Coil Data

awg (0XX) ³	Resistance (@20°C)	# Turns ⁴	VDC (Nom)	VDC (Nom)	VDC (Nom)	VDC (Nom)
23	14.60	2544	17.1	24.2	34.2	54.0
24	23.30	3204	21.6	30.5	43.2	68.3
25	36.40	3990	27.0	38.2	54.0	85.3
26	56.20	4906	33.5	47.4	67.1	106.0
27	95.30	6474	43.7	61.7	87.3	138.1
28	142.90	7798	53.5	75.6	106.9	169.1
29	231.80	9952	68.1	96.3	136.2	215.3
30	368.40	12510	85.8	121.4	171.7	271.4
31	575.40	15520	107.3	151.7	214.6	339.2
32	940.20	19895	137.1	193.9	274.3	433.6
33	1,425.00	24125	168.8	238.7	337.6	533.9

¹ Continuously pulsed at stated watts and duty cycle

² Single pulse at stated watts (with coil at ambient room temperature 20°C)

³ Other coil awg sizes available — please consult factory

⁴ Reference number of turns

Specifications

Dielectric Strength	1000 VRMS
Recommended Minimum Heat Sink	Maximum watts dissipated by solenoid are based on an unrestricted flow of air at 20°C, with solenoid mounted on the equivalent of an aluminum plate measuring 10" square by $\frac{1}{8}$ " thick
Coil Resistance	$\pm 5\%$ tolerance
Holding Force	18 lbs (80.06 N) @ 20°C
Weight	2.25 lb (1.02 kg)
Dimensions	Ø1.75" x 4.71" L (See page E30)


How to Order

Add the coil awg number (0XX) to the part number (for example: to order a 25% duty cycle unit rated at 87 VDC, specify 194580-027).

Please see www.ledex.com (click on Stock Products tab) for our list of stock products available through our North American distributors.

All specifications subject to change without notice.

Size 175 Pull — Typical Force @ 20°C

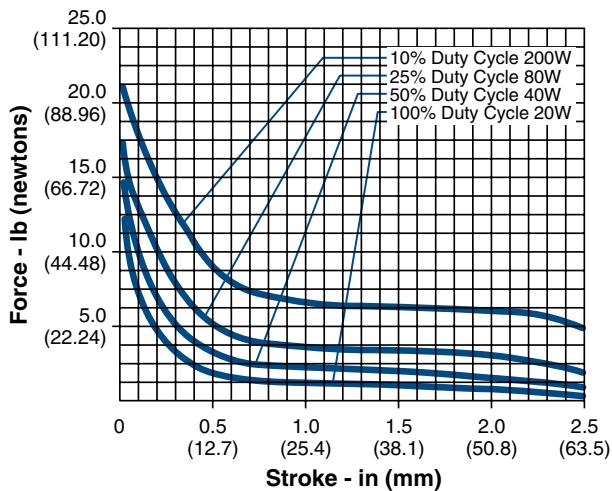

Force values for reference only.

E24


saia-burgess Solenoids

1-800-998-2298

www.saia-burgess-usa.com/ledex

Fax: 1-937-898-8624


Size 175 Pull — Typical Speed @ No Load, 20°C

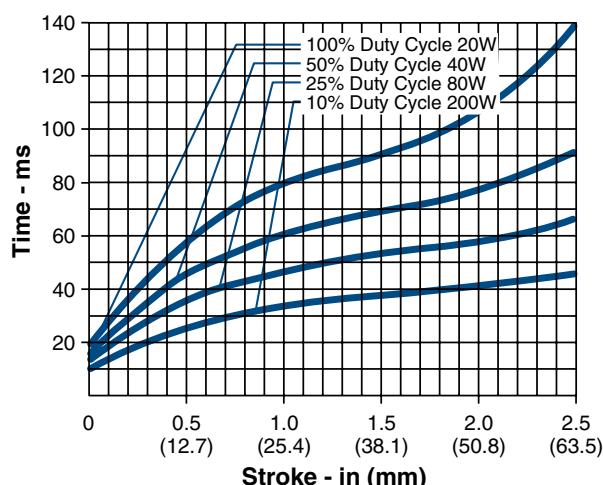


Ledex® Tubular Solenoids Dimensions

Inches (mm)

STA® Series Pull — ½" Dia. x ½"

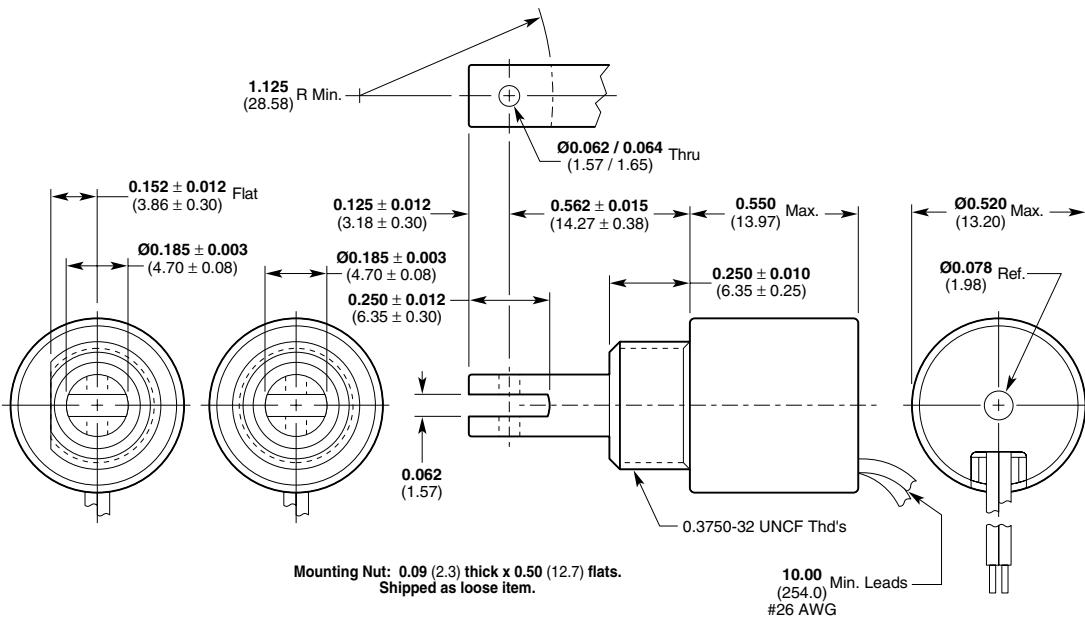

STA® Series Push — ½" Dia. x ½"

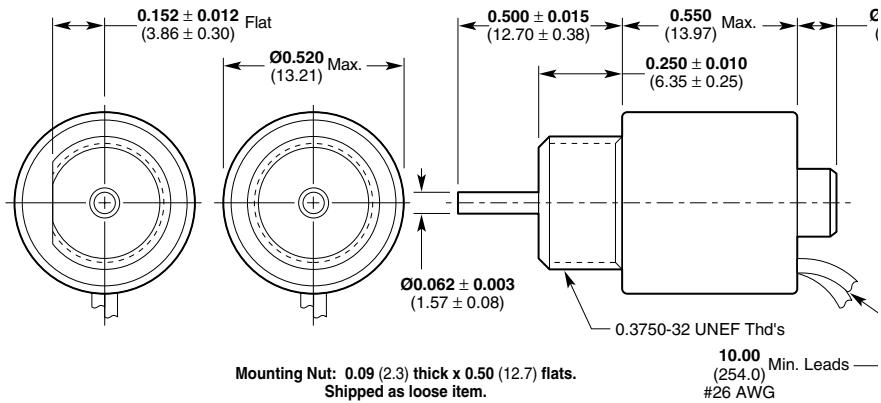


All solenoids are illustrated in energized state

All specifications subject to change without notice.


Ledex® Tubular Solenoids Dimensions

Inches (mm)

STA® Series Pull — ½" Dia. x 1"

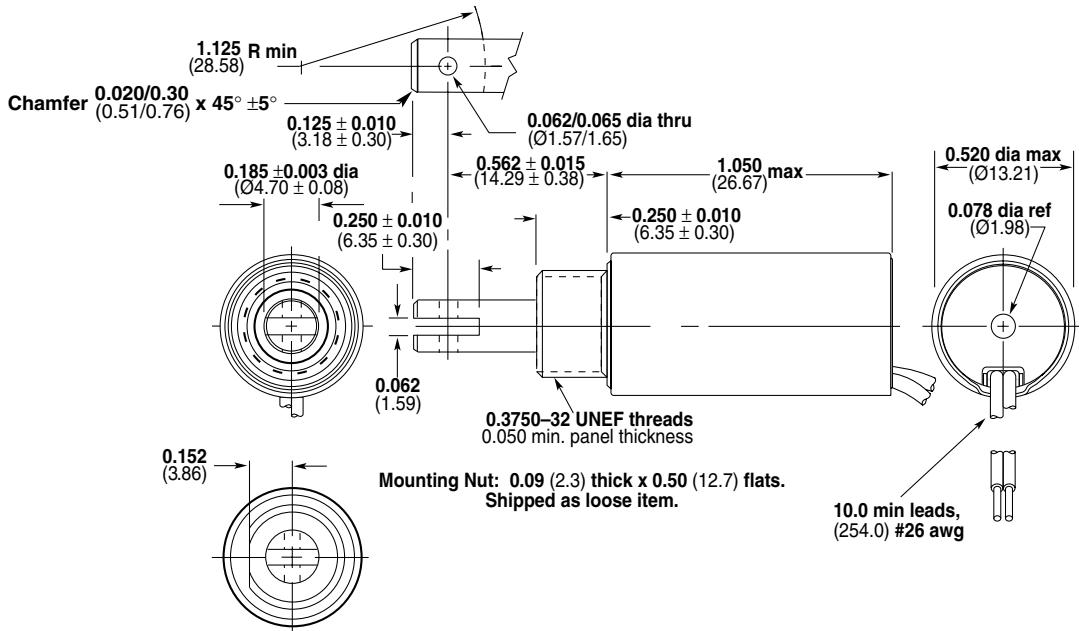

STA® Series Push — ½" Dia. x 1"

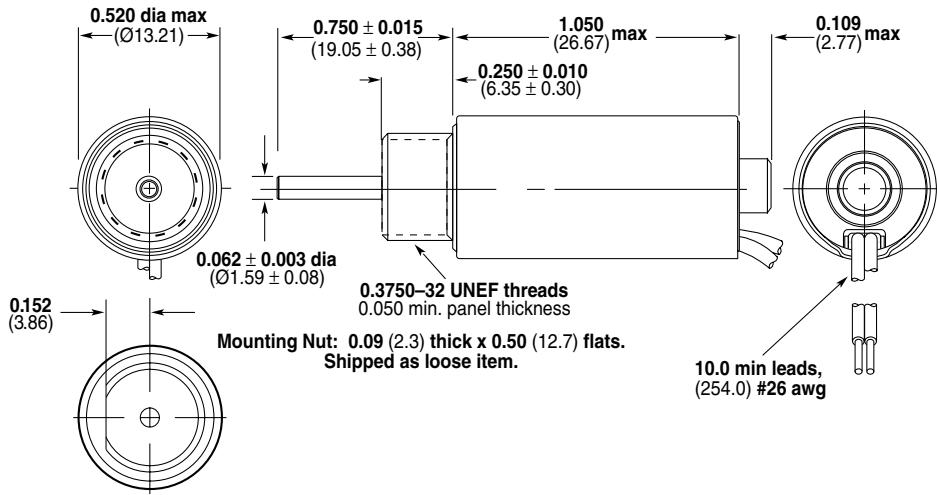


All solenoids are illustrated in energized state

All specifications subject to change without notice.

Ledex® Tubular Solenoids Dimensions


Inches (mm)

STA® Series Pull — $\frac{3}{4}$ " Dia. x $1\frac{1}{2}$ "

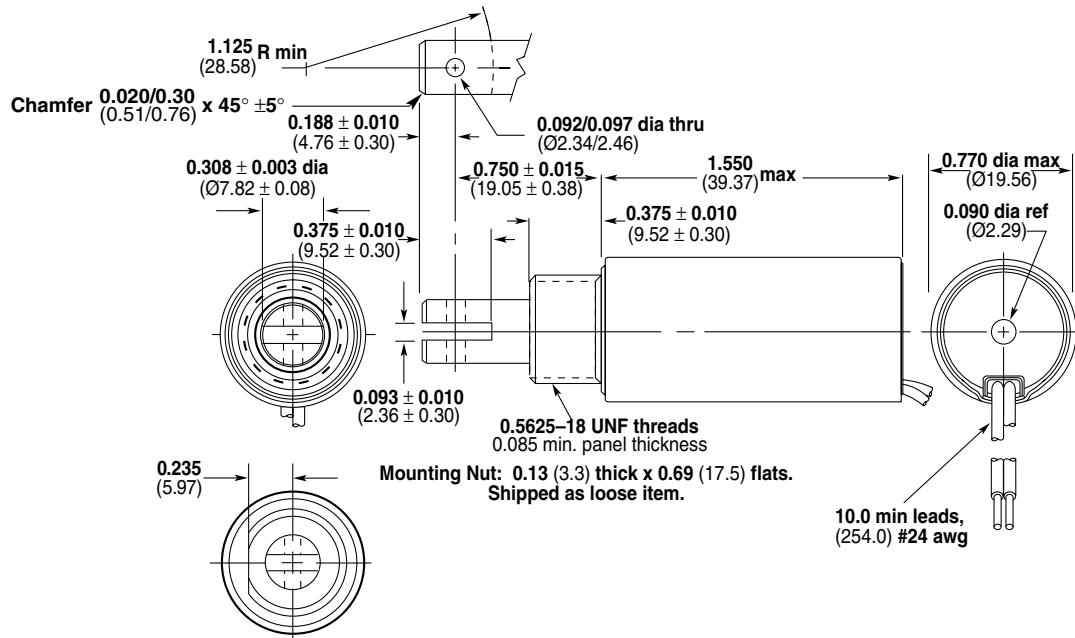

LINEAR Tubular

STA® Series Push — $\frac{3}{4}$ " Dia. x $1\frac{1}{2}$ "

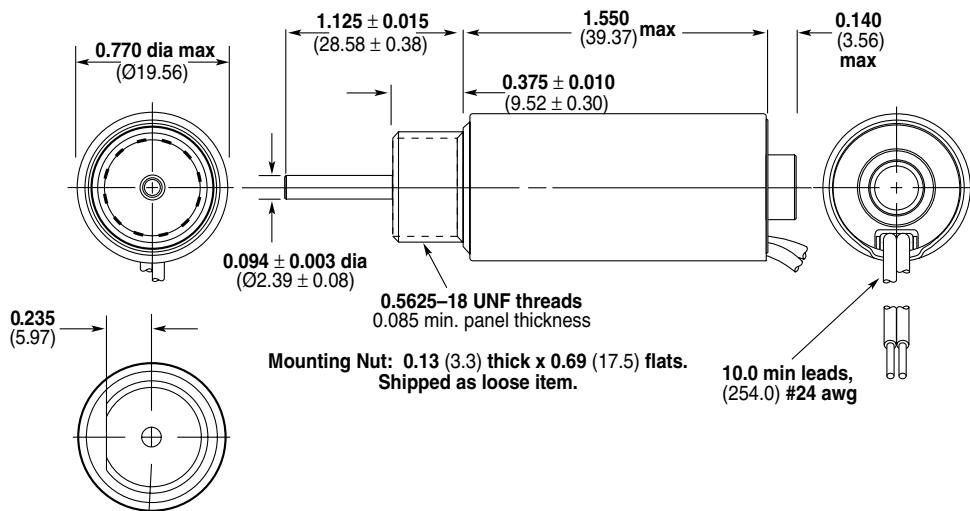


All solenoids are illustrated in energized state

All specifications subject to change without notice.


Ledex® Tubular Solenoids Dimensions

Inches (mm)

STA® Series Pull — 1" Dia. x 2"

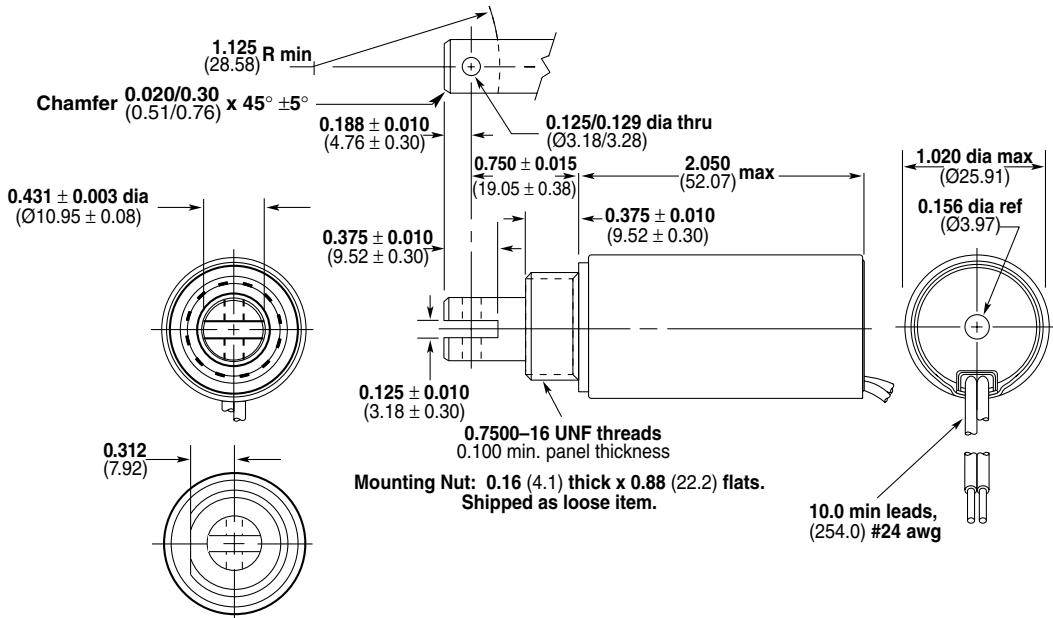

STA® Series Push — 1" Dia. x 2"

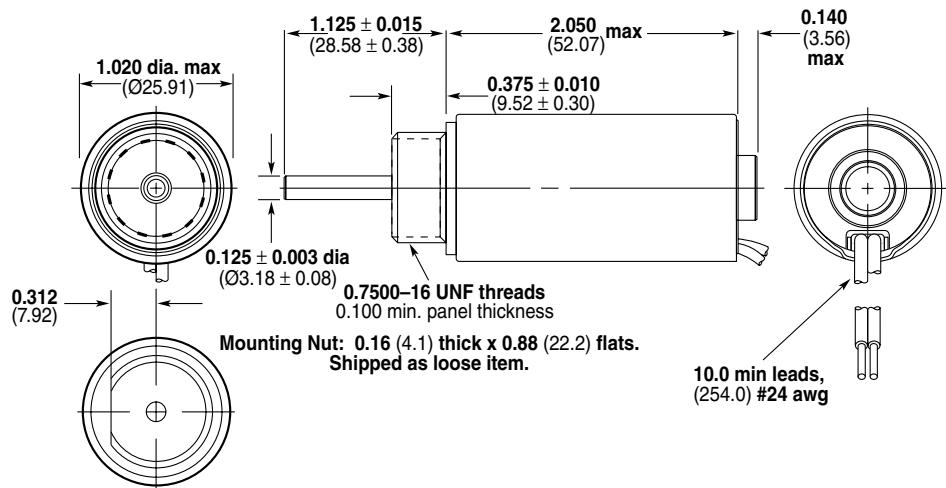


All solenoids are illustrated in energized state

All specifications subject to change without notice.


Ledex® Tubular Solenoids Dimensions

Inches (mm)

Ledex® Size 125 Pull — 1¼" Dia. x 2¼"

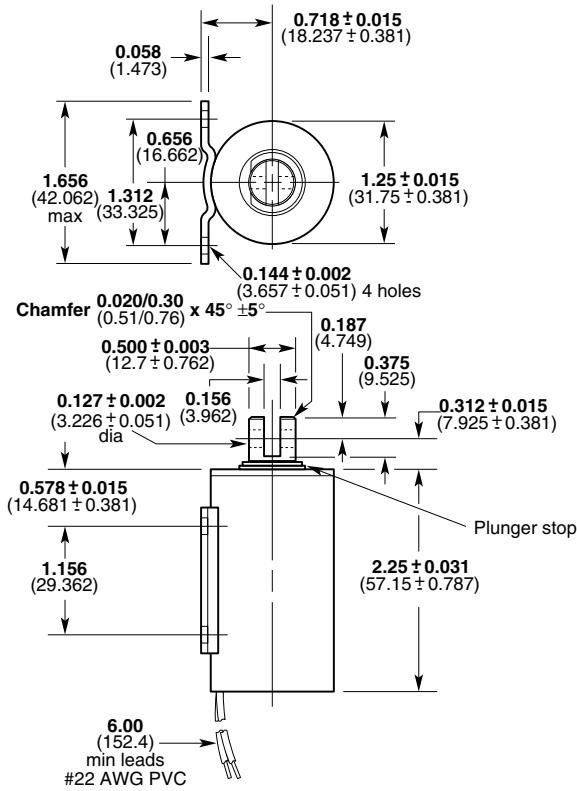

Ledex® Size 150 Pull — 1½" Dia. x 2½"

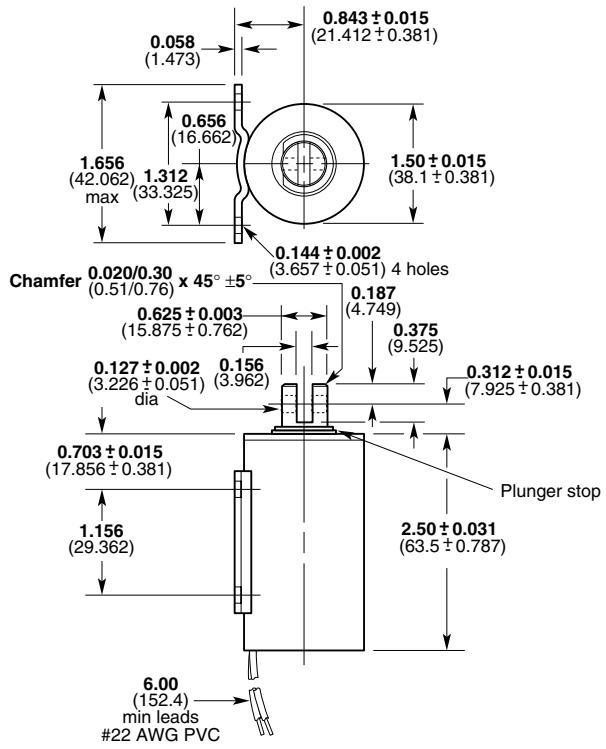

All solenoids are illustrated in energized state

All specifications subject to change without notice.

Ledex® Tubular Solenoids Dimensions

Inches (mm)

All solenoids are illustrated in energized state

Ledex® Size 175 Pull — 1 $\frac{3}{4}$ " Dia. x 4 $\frac{3}{4}$ "

